



12 Inch Incandescent Look LED Traffic Signals



12' Pedestrian light



Features/Benefits

- Reduce overall operating & maintenance costs:Energy saving:90% reduction in power consumption vs incandescent
- Reliability & traffic safety:·Improved visibility over life of the product Reduces emergency lamps outs Design minimizes sun phantom effects
- Easy to install into existing signal enclosure

Specifications

Test parameter

- Shape:300mm (12")
- High brightness LEDs with integrated optics
- Moisture and dust tight seal(IP54)
- Total Harmonic Distortion<20%(with PFC)
- OperatingTemperature Range(optional):
-30°C to 60°C
- Angle:Avg. ≥30° Down ≥30°
- Operating voltage Range:85V to 265VAC
- Insulation Resistance:≥2M
- Life:100,000H
- housing material:PC(PMMA)

PFC test:PFC>0.95 Pass: CE






SHENZHE NOBLE OPTO CO.,LTD

green light,green life

Http://www.nobleled.com E-mail:sales@nobleled.com TEL:+86-755-27654119 FAX:+86-755-29002484

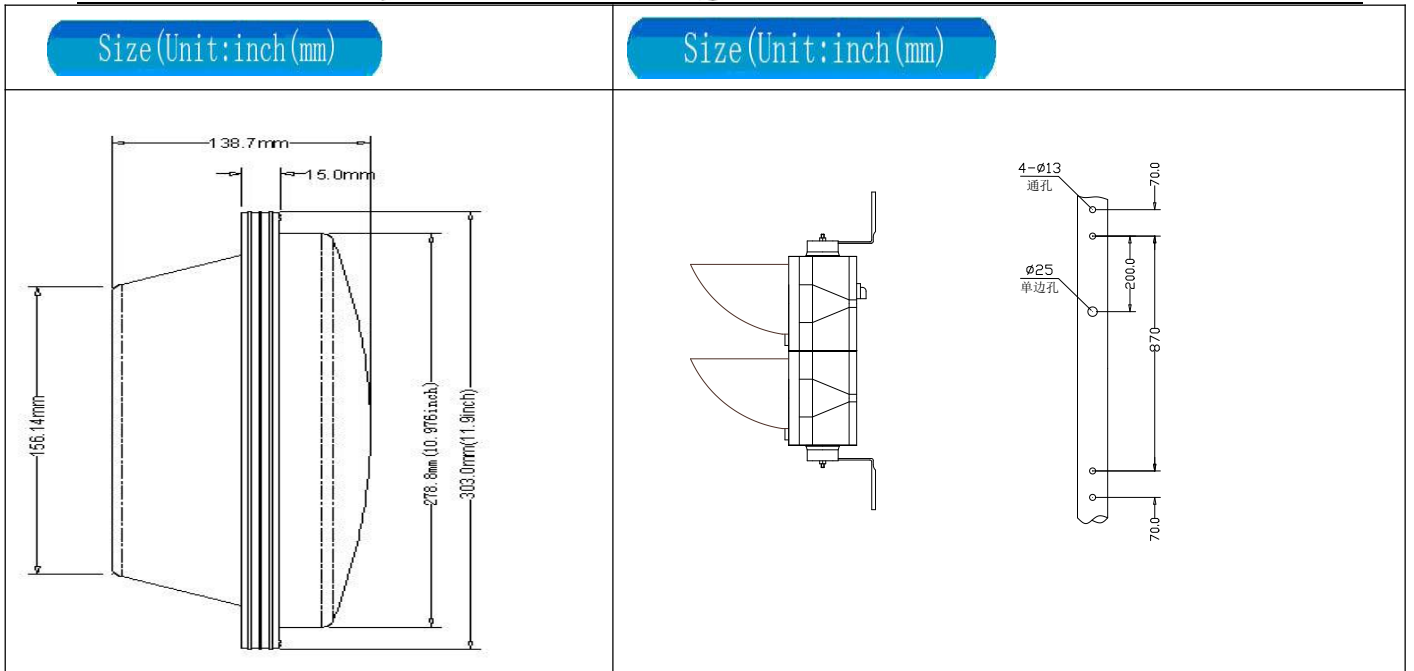

Characteristics

Color	Size	Model Number	Profile	Voltage	LEDs	Typical Wattage at 25°C	Luminance (cd/m ²)	Typical Dominant Wavelength (nm)
	(mm)							
Red	300	NBRX300R-1	Round	100~277VAC	80s	<7	>4000	625
Green	300	NBRX300G-1	Round	100~277VAC	78s	<8	>4000	500

Gather to pack:

Model	housing material	Dim.of Outer Carton	Quantity/CTN	G.W/CTN	N.W/CTN	packing
NBRX312-2	PC	820*430*270	1PCS	9.7	7.5	carton



SHENZHE NOBLE OPTO CO.,LTD

green light,green life

Http://www.nobleled.com E-mail:sales@nobleled.com TEL:+86-755-27654119 FAX:+86-755-29002484

Building C,MingJinHai Industrial Park,SanJiaoTang,ShiYan Town, BaoAn District,Shenzhen,China
 TEL:86-0755-27651481 FAX:86-0755-27651483 PostCode:518108
 Http://www.nobleled.com Email:sales@nobleled.com Copyright©Noble opto co.,ltd